

**Industrial**


**RPGS**

**Fabrication**

Frame  
75 x 75mm (3" x 3") RHS



Frame  
50 x 50mm (2" x 2") RHS

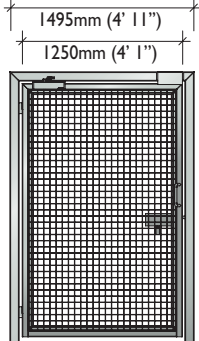


Viewed from secure side



50 x 50 x 4mm (2" x 2" x 0.16") welded mesh illustrated

**Optional Disabled Access Kit**

- Low energy (DDA compliant) 240V / 2.5A
- Complies with emergency exit requirements
- Controlled via a PLC
- Programmable to work with access control systems
- Other options include UPS function, electric locking and safety sensor.

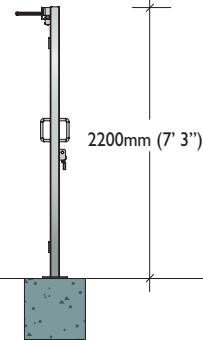

Pavement Surface

**Security**

**PSWS / PSWSC**

**Fabrication**


Post / O/head Rail  
75 x 75mm (3" x 3") RHS



Frame  
50 x 50mm (2" x 2") RHS



**PSWS**

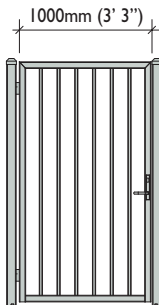


**With overhead rail**

**PSWSC**



Viewed from secure side

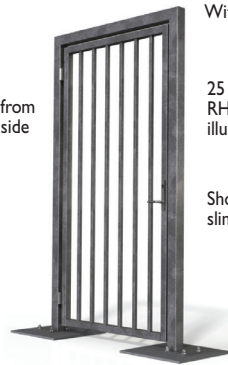


With overhead rail

25 x 25mm (1" x 1") RHS pickets illustrated

Shown with slimline mortice lock.

25 x 25mm (1" x 1") RHS pickets illustrated  
> Refer to p92 for infill options



Pavement Surface

Lock Options					Auto Closer	Finish		
Padlock	Drop Bolt	Mortice	Magnetic	Electric		Hot Dip Gal	Powdercoat	Wet Spray
Standard	Standard	N/a	N/a	N/a	N/a	Incl	Incl	Opt
N/a	N/a	Optional	Optional	Optional	Optional	Incl	N/a	Opt
Optional	Optional	Optional	Optional	Optional	Optional	Incl	N/a	Opt
Optional	Optional	Optional	Optional	Optional	N/a	Incl	Incl	Opt
Optional	Optional	Optional	Optional	Optional	Optional	Incl	Incl	Opt